# SERIE S

The S Series tools are specifically designed for grinding **soft concrete** floors (with a hardness of approximately 3-5 on the Mohs scale). These tools feature **4 large segments** (10mm  $\times$  40mm  $\times$  10mm) that make them highly efficient, providing significant material removal capacity while minimizing tool wear.

### DRY USE FOR CONCRETE PREPARATION:



#### **ADVANTAGES:**




HG HYPER PREP represents the leading line of preparation tools, ensuring profitable results while meeting deadlines. Accurate substrate preparation is essential, especially on floors and concrete surfaces. In challenging preparation situations, the choice of tools makes a difference. Whether it's removing old paint or levelers for a new coating or preparing a concrete surface for grinding and polishing, selecting the right tools is crucial for achieving excellent results. The Quick Lock tool's "curved engagement" system allows for easy mounting and dismounting, ensuring a secure hold during operation.





#### **RECOMMENDED MACHINES:**

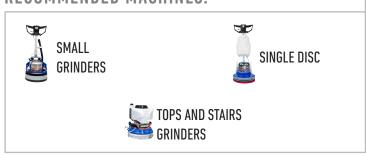

## **GRITS:**



#### OTHER AVAILABLE SIZES:

- Quick Lock tools can be used on all tool holders ranging from ø140mm to ø430mm
- Diameters ø100mm and ø140mm are available with AS attachment.
- Diameters ø200mm and ø240mm are available with QA attachment.

